


BEFARD XM 800 (990kg x 1m)

- Tracked Steel Beam Lifter
- 720kg Max capacity - steel beam bracket
- 990kg Max capacity - main hook
- 4.6m Max Working Height
- Super Slim Body Width (780mm)
- 3-speed function
- Optional Searcher Hook

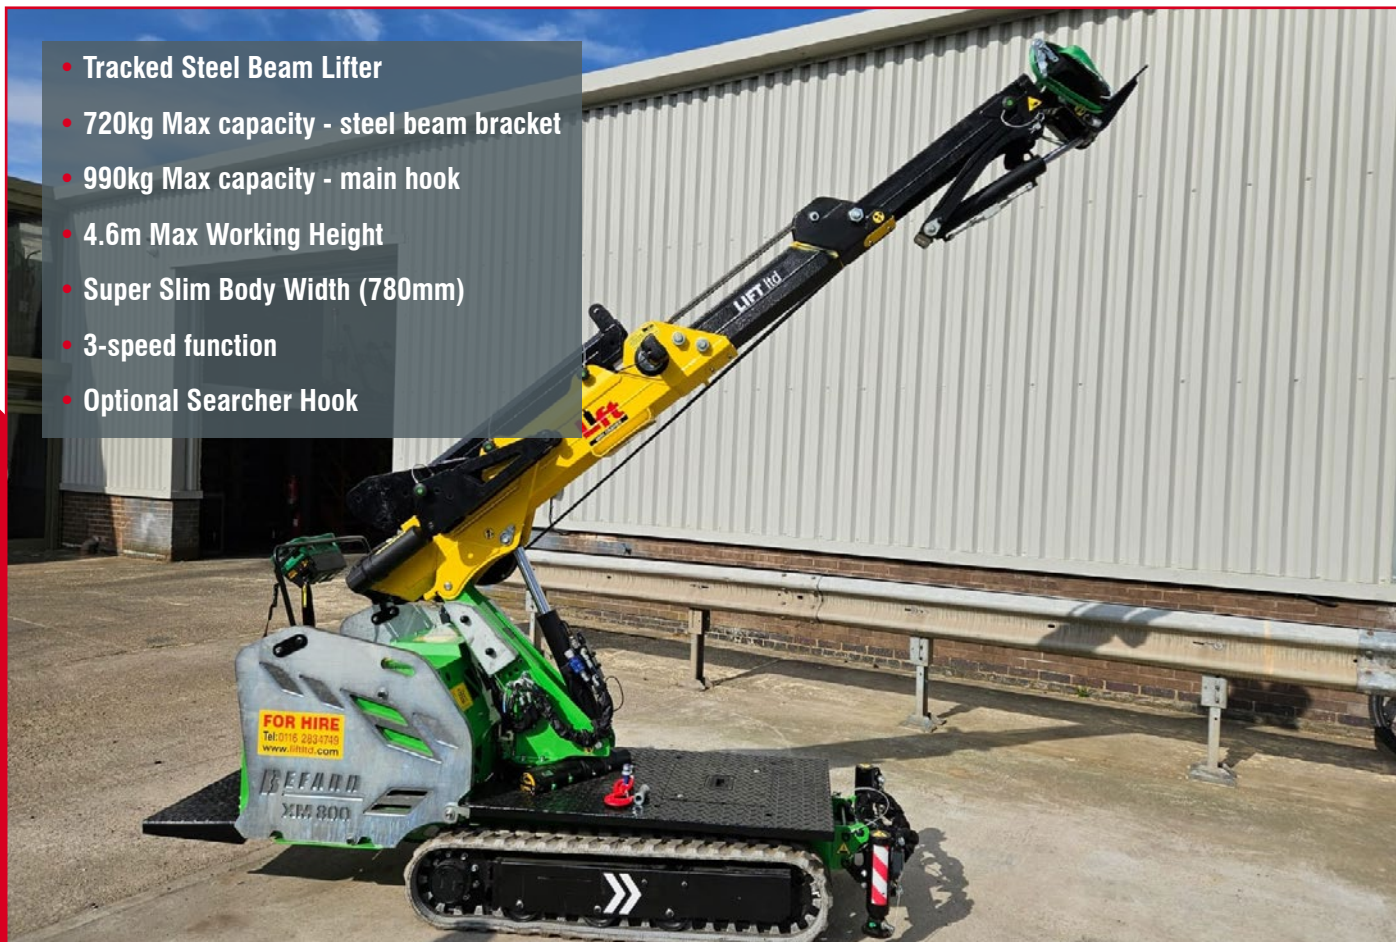

A robust solution engineered for seamless installation of steel beams, including I-beams, RSJs, and universal beams.

Crane Specifications


Maximum capacity	with outriggers down:	990kg (crane mode) 720kg (steel beam lifter)
Max working radius	outreach:	3.5m
Max lifting height	height:	4.6m (crane mode) 4.5m (steel beam lifter)
Slewing angle	angle:	25° left + 25° right
Weight	crane:	1152kg approx.
Traction system	speed:	three speed
	unladen gradeability:	20° (vertical), 10° (traverse)
	ground pressure:	0.17kg/cm ²
	fuel:	petrol
Engine	tank capacity:	6 litres
Standard equipment	low marking tracks, radio remote control, rotating column (50°), anti-overload system, outriggers, LED work lamp	
Optional equipment	500kg capacity winch*, searcher hook (500mm), fly jib (1000mm), removable 500mm platform extension, operator platform, radio remote holder	



Working Range


Rated Loads - Main Hook - With Outriggers

NOTE: STATIONARY ONLY WORK - SHOWN LOADS ARE FOR ONLY WITH DEPLOYED OUTRIGGERS, NOT PICK & CARRY

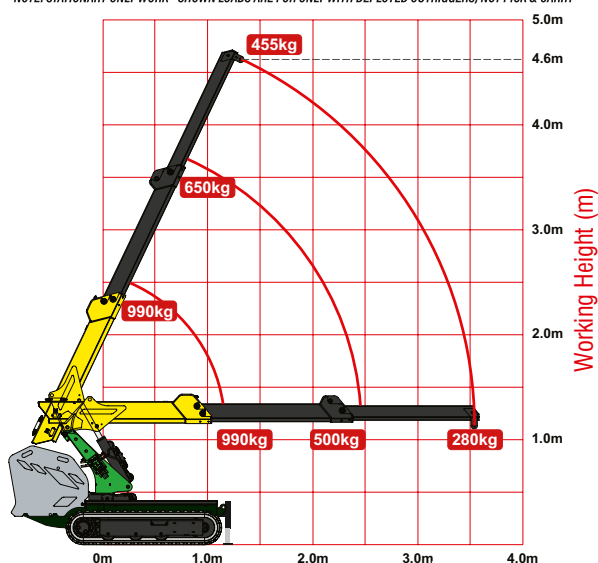


Rated Loads - Steel Beam Bracket - With Outriggers


NOTE: STATIONARY ONLY WORK - SHOWN LOADS ARE FOR ONLY WITH DEPLOYED OUTRIGGERS, NOT PICK & CARRY

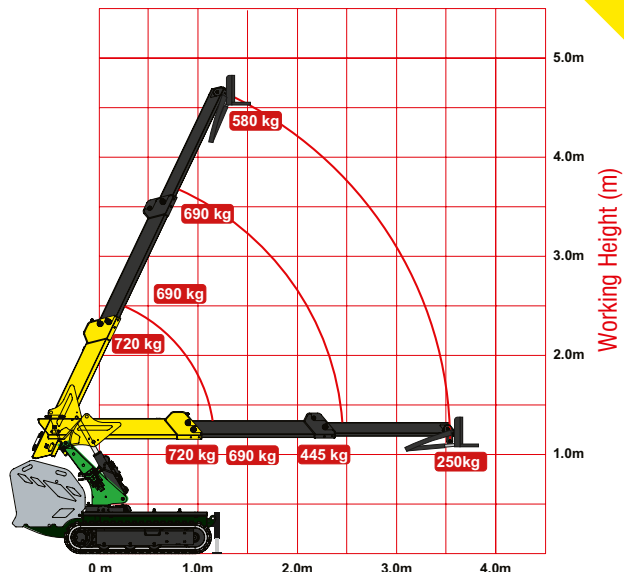

Rated Loads - Main Hook - Without Outriggers

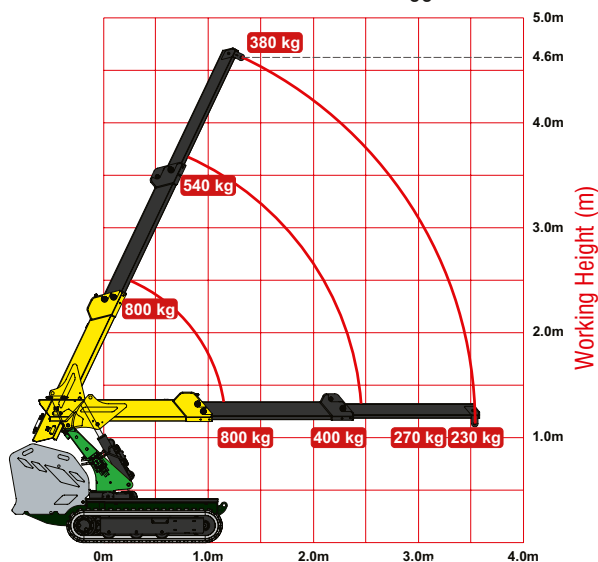

Rated Loads - Searcher Hook - Without Outriggers

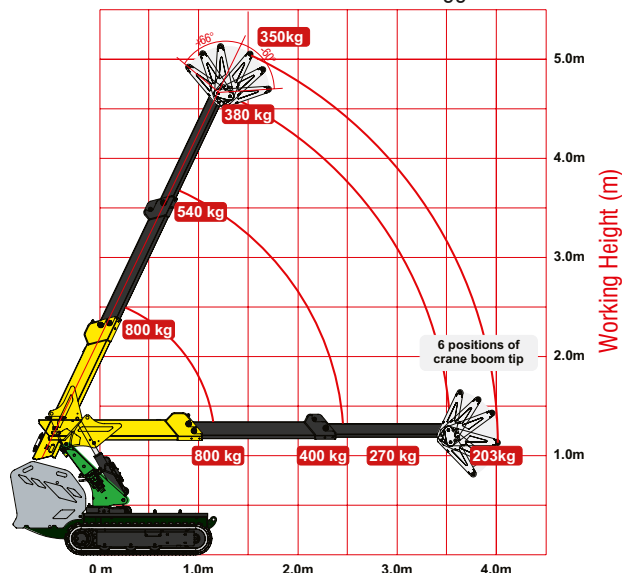

Dimensions

