



# BGLIFT-M250 (2.5t x 1.5m)




- Built for indoor and outdoor
- Limited spaces
- Ballast free boom
- Folded hydraulic jib
- Radio remote control
- Automatic stabilisation
- Two man baskets capacity



## Working Ranges

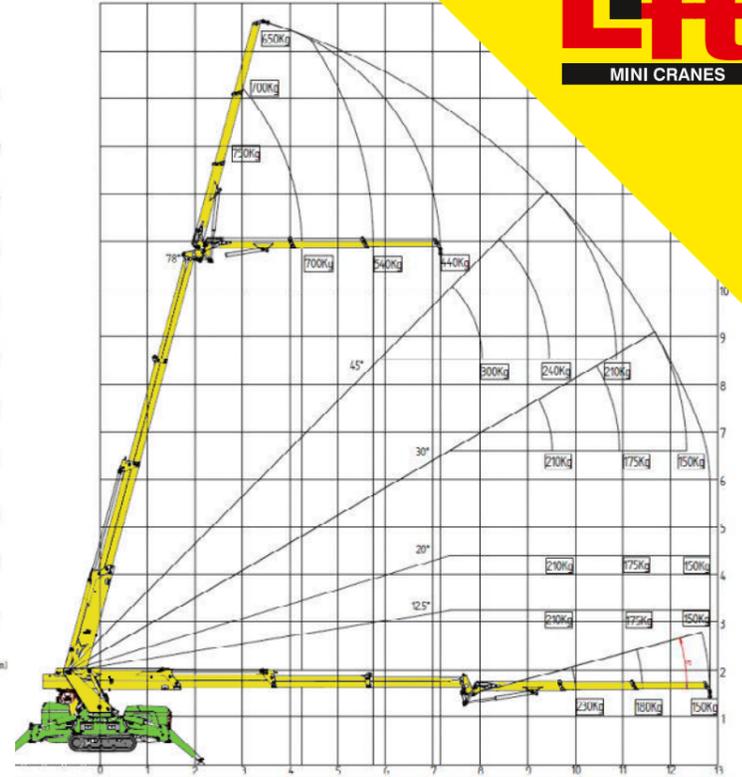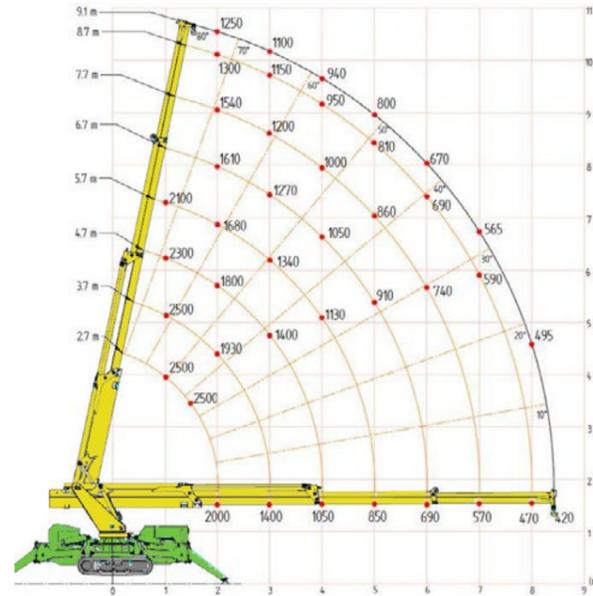

## Dimensions

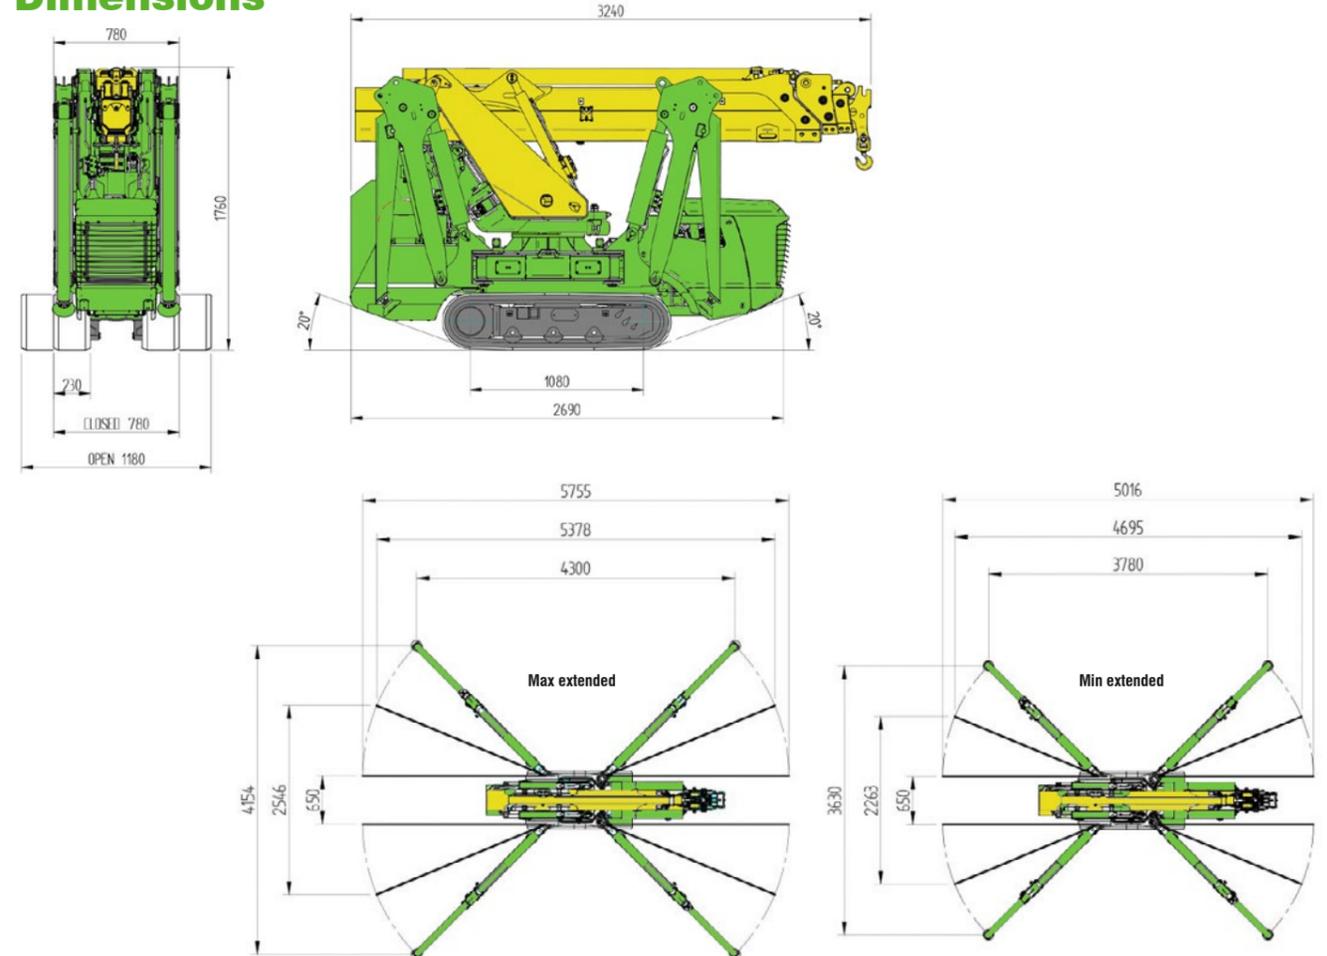

## Crane Specifications

<b>Crane capacity</b>	capacity:	2.5 t x 1.5m
<b>Max working radius</b>	max:	8.43m (12.85m jib)
<b>Max lifting height (on ground)</b>	approx:	10.4m (16m jib)
<b>Dimensions</b>		1.76m x 0.78m x 3.24m
<b>Machine weight</b>		2420 Kg
<b>Slewing angle/rotation speed</b>		Continuous / 1.5 rpm
<b>Winch (optional)</b>	First layer pull	900 Kg
	Rope length	68m
	Speed in direct pull	47m / min
<b>Stability system</b>		Max 4155x4300
<b>Weights</b>	Jib	210 kg
	Electric motor	40 kg
	Winch	65 kg
<b>Crawler Crane Traction</b>	Transmission	Moto-reducer
	Scope	50 l / min
	Pressure	170 Bar
	Speed	0 - 2 Km/h
	Max slope degree	25°
	Max pressure on the ground	0.47 Kg/cm <sup>2</sup>
<b>Electric Engine</b>	Power supply	48 V
	Battery capacity	200 Ah
	Power	8.5 W - 12 Hp

